




**Technical Data**

Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U <sub>b</sub> = 24V)	500 mA
Temperature Range	-25...60 °C
Switching Outputs	3
PNP Switching Output/Switching Current	400 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Mechanical Data	
Housing	Plastic
Weight	73 g
Protection Mode	IP 50
Connection Mode Scanner	SubD 15 S
Connection Mode Supply Voltage, I/O	M 12x1
Connection Bus Side	M 12x1
DIN-Rail mounting	35 mm

- Easy Handling
- NPN-PNP Conversion of the Scanner I/Os
- RS-232 / 422- / 485- Interfaces to Host, to Busgateway or for Daisy Chain of the Scanners
- Voltage Supply for the Scanners (5V)

This Connection Box offers an universal solution for a smooth scanner operation. It combines voltage supply and NPN-PNP converter in one. Quickly and easily it can be connected to PC or laptop for configuration.

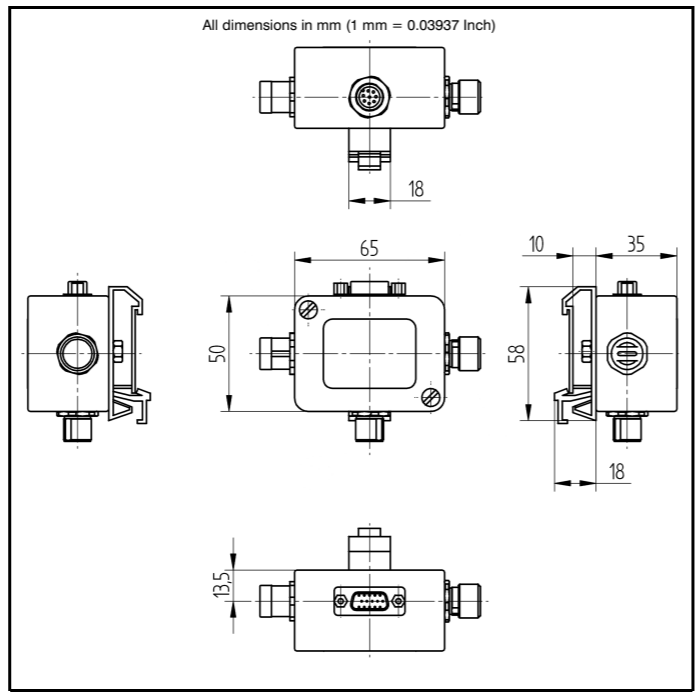

Specifications are subject to change without notice  
15/06

Plug Version	
Part Number	AB-0003-1
PNP NO/NC switchable	●
Connection Table Nr.	35



**Accessories**

- Connecting Cable BG88SG88V2-xx
- Connecting Cable S88-xxMPUR
- Serial Interface Adapter S232W3