

# Reflex Sensors

with Background Suppression


## HT77PA3

Part Number




- Adjustable Time Delay
- Infrared Light
- Plug can be rotated
- Triple Beam Correction Principle

These sensors are particularly well suited for recognizing objects in front of any type of background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

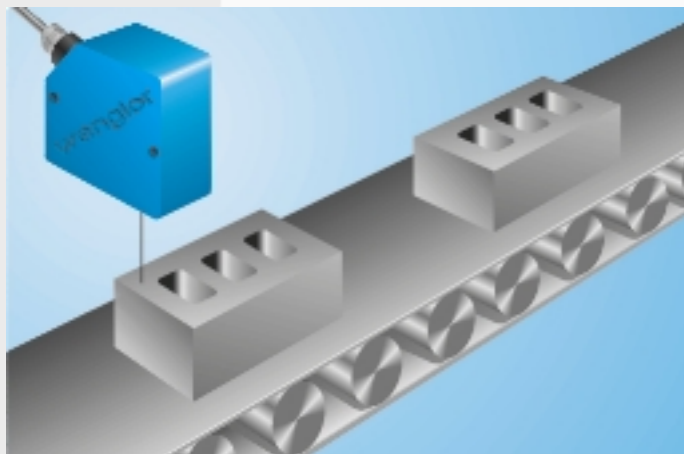

### Technical Data

Optical Data	
Range	1500 mm
Switching Hysteresis	< 5 %
Light Source	Infrared Light
Service Life (T = +25°C)	100000 h
max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U <sub>b</sub> = 24V)	40 mA
Switching Frequency	300 Hz
Response Time	1700 μs
Time Delay	0...1 s
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2.5 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Mechanical Data	
Housing	Plastic
Protection Mode	IP 67
Connection	M 12x1
Protective Insulation, Rated Voltage	50 V

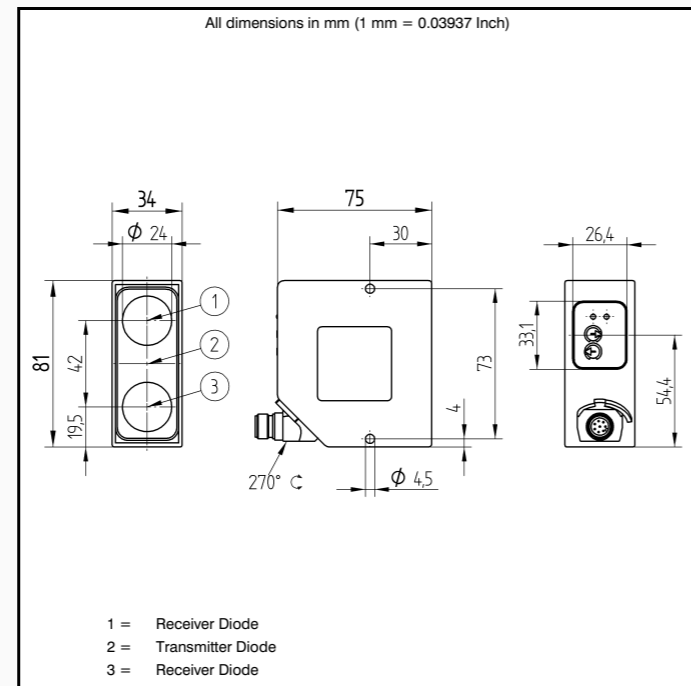


Specifications are subject to change without notice  
17/03



Table 1

Range	300 mm	800 mm	1500 mm
Light Spot Diameter	6 mm	18 mm	30 mm

Plug Version	Part Number
HT77PA3	HT77PA3
PNP NO/NC antivalent	●
Connection Diagram No.	101
Control Panel No.	T1
Suitable Plug No.	1

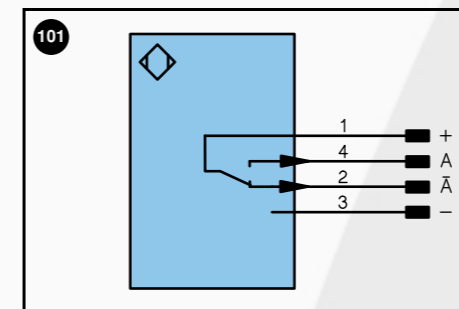


Legend		Wire colors according to DIN IEC 757
+	Power supply "+"	BK black
-	Power supply "0V"	BN brown
-	Power supply (AC Voltage)	RD red
A	Switching output (1,2,3...)/ NO	OG orange
A	Switching output (1,2,3...)/ NC	BZ yellow
V	Contamination / Error output (NO)	GN green
V	Contamination / Error output (NC)	BU blue
E	Input (analog or digital)	VT violet
T	Teach input	GY grey
Z	Time delay (activation)	WH white
S	Shielding	PK pink
RxD	RS-232 receive path	GNYE green yellow
TxD	RS-232 send path	
U	Test input	
W	Trigger input	
O	Analog output (1,2,3,...)	
O-	Ground for the analog output	
BZ	Block discharge	
Aw	Valve output	
a	Valve control output "+"	
b	Valve control output "0V"	
SY	Synchronization	
E+	Receiver-Line	
S+	Emitter-Line	
⊕	Grounding	

### Accessories

Mounting Bracket WT

### Ctrl. Panel



- 01 = Switching Status Indicator
- 05 = Switching Distance Adjuster
- 11 = ON-Delay/ OFF-Delay Switch
- 32 = Contamination Warning/ Error Warning

### Switching Distance Deviation

Typical characteristic curve based on Kodak white, 90%

