

Reflex Sensors

with Background Suppression

HT80PA3

Part Number



- Adjustable Time Delay
- Plug can be rotated
- Red Light
- Triple Beam Correction Principle



Technical Data


Optical Data	
Range	800 mm
Switching Hysteresis	< 5 %
Light Source	Red Light
Service Life (T = +25°C)	100000 h
max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24V)	40 mA
Switching Frequency	300 Hz
Response Time	1700 μs
Time Delay	0...1 s
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2.5 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Mechanical Data	
Housing	Plastic
Protection Mode	IP 67
Connection	M 12x1
Protective Insulation, Rated Voltage	50 V



Table 1



Range	300 mm	800 mm
Light Spot Diameter	10 mm	20 mm

Plug Version	Part Number
CE, 50 V, TÜV, UL LISTED	HT80PA3
PNP NO/NC antivalent	●
Connection Diagram No.	101
Control Panel No.	T 1
Suitable Plug No.	2

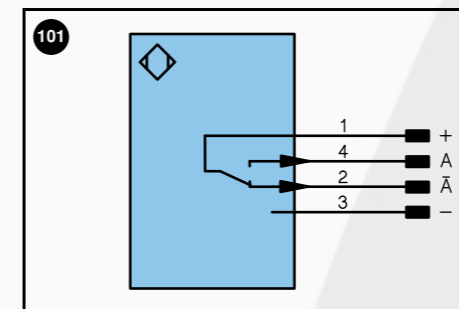

Legend		Wire colors according to DIN IEC 757
+	Power supply "+"	BK black
-	Power supply "0V"	BN brown
-	Power supply (AC Voltage)	RD red
A	Switching output (1,2,3...)/ NO	OG orange
A	Switching output (1,2,3...)/ NC	YE yellow
V	Contamination / Error output (NO)	GN green
V	Contamination / Error output (NC)	BU blue
E	Input (analog or digital)	VT violet
T	Teach input	GY grey
Z	Time delay (activation)	WH white
S	Shielding	PK pink
RxD	RS-232 receive path	GNYE green yellow
TxD	RS-232 send path	
U	Test input	
W	Trigger input	
o	Analog output (1,2,3,...)	
o-	Ground for the analog output	
BZ	Block discharge	
Aw	Valve output	
a	Valve control output "+"	
b	Valve control output "0V"	
SY	Synchronization	
E+	Receiver-Line	
S+	Emitter-Line	
⊕	Grounding	


These sensors are particularly well suited for recognizing objects in front of any type of background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

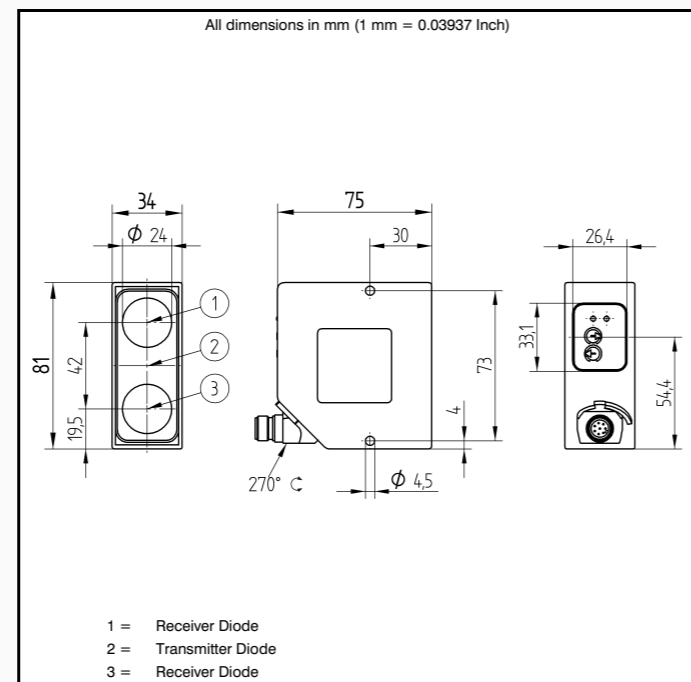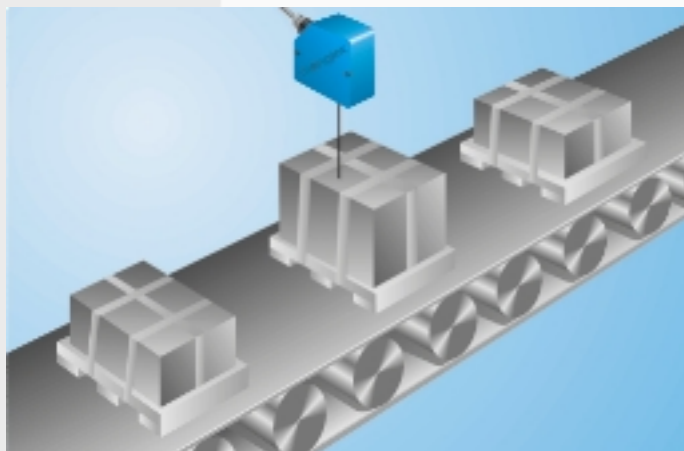

Accessories

Mounting Bracket WT

Ctrl. Panel



- 01 = Switching Status Indicator
- 05 = Switching Distance Adjuster
- 11 = ON-Delay/ OFF-Delay Switch
- 32 = Contamination Warning/ Error Warning

Switching Distance Deviation

Typical characteristic curve based on Kodak white, 90%

