


Inductive Proximity Switch

flush Housing M M8 x 1

IM020BM60VB8

Part Number

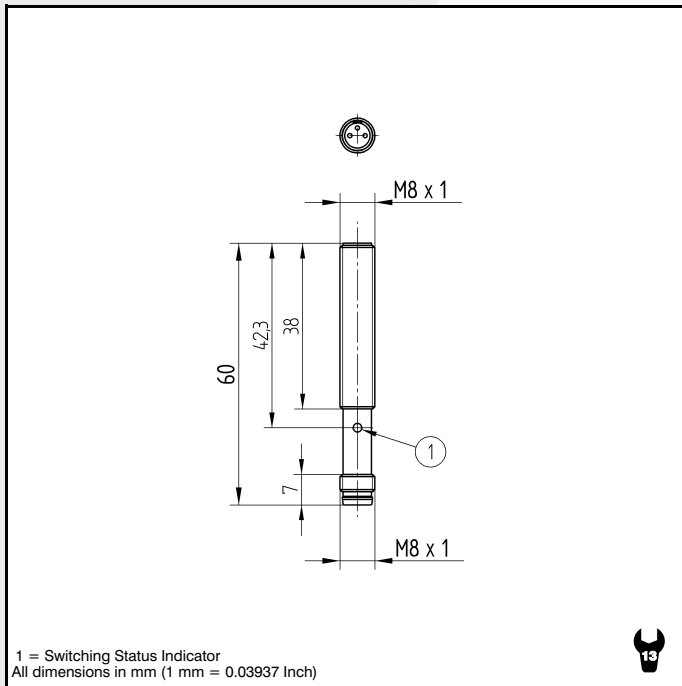


Technical Data

Inductive Data	
Switching Distance	2 mm
Correction Factors V2A / Brass / Al	0.73/0.55/0.45
Mounting	flush
Switching Hysteresis	< 15 %
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24V)	< 6 mA
Switching Frequency	1500 Hz
Temperature Drift	< 10 %
Temperature Range	-25...80 °C
Switching Output Voltage Drop	< 2.5 V
Switching Output/Switching Current	200 mA
Residual Current Switching Output	< 100 µA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Mechanical Data	
Housing	BrasNicPlated
Full Encapsulation	yes
Protection Mode	IP 67
Connection	M 8x1



Part Number	IM020BM60VB8
PNP NO	●
Connection Diagram No.	102
Suitable Plug No.	1

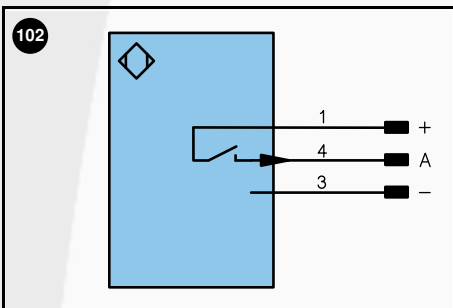

Legend		Wire colors according to DIN IEC 757
+	Power supply "+"	BK black
-	Power supply "0V"	BN brown
A	Switching output (1,2,3...) / NO	RD red
Ā	Switching output (1,2,3...) / NC	OG orange
V	Contamination / Error output (NO)	YE yellow
V̄	Contamination / Error output (NC)	GN green
E	Input (analog or digital)	BU blue
T	Teach input	VT violet
Z	Time delay (activation)	GY grey
S	Shielding	WH white
RxD	RS-232 receive path	PK pink
TxD	RS-232 send path	GNYE green yellow
U	Test input	
W	Trigger input	
O	Analog output (1,2,3...)	
O-	Ground for the analog output	
bz	Block discharge	
AwV	Valve output	
a	Valve control output "+"	
b	Valve control output "0V"	
Sy	Synchronization	
E+	Receiver-Line	
S+	Emitter-Line	
⊕	Grounding	

Specifications are subject to change without notice