


# Inductive Proximity Switch

flush Housing W M18 x 1

## IW050BM81KD

Part Number

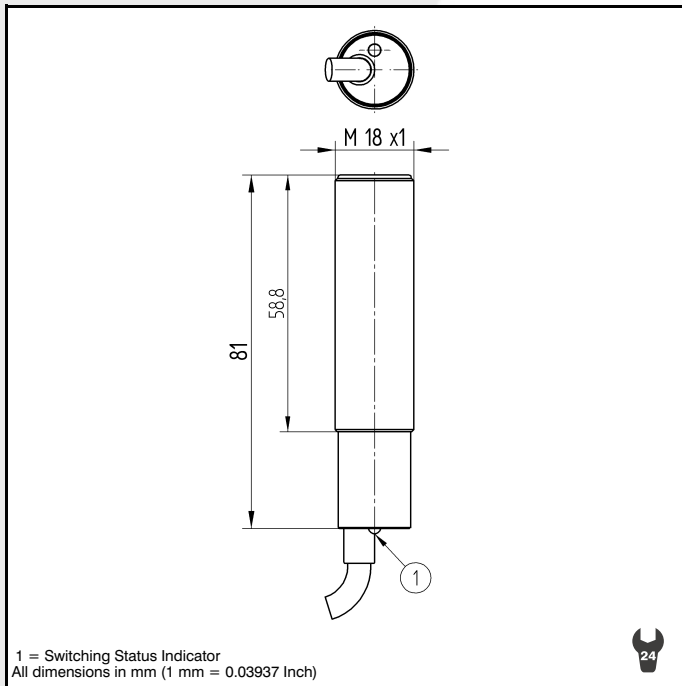


### Technical Data

Inductive Data	
Switching Distance	5 mm
Correction Factors V2A / Brass / Al	0.73/0.44/0.42
Mounting	flush
Switching Hysteresis	< 15 %
Electrical Data	
Supply Voltage	20...250 V AC
Supply Voltage	20...250 V DC
Min. Output Current	5 mA
Switching Frequency	25 Hz
Temperature Drift	< 10 %
Temperature Range	-25...80 °C
Switching Output Voltage Drop	< 4.5 V
Switching Output/Switching Current	400 mA
Residual Current Switching Output	< 2500 µA
Short Circuit Protection	yes
Mechanical Data	
Housing	BrasNicPlated
Full Encapsulation	yes
Protection Mode	IP 67
Connection	Prewired
Cabel Length	2 m
Protective Insulation, Rated Voltage	250 V



Part Number	IW050BM81KD
AC / DC NC	●
Connection Diagram No.	807

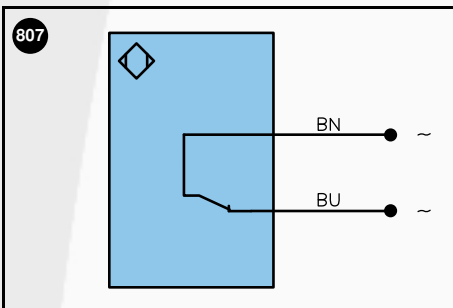

Legend		Wire colors according to DIN IEC 757
+	Power supply "+"	BK black
-	Power supply "0V"	BN brown
~	Power supply (AC Voltage)	RD red
A	Switching output (1,2,3...) / NO	OG orange
Ā	Switching output (1,2,3...) / NC	YE yellow
V	Contamination / Error output (NO)	GN green
V	Contamination / Error output (NC)	BU blue
E	Input (analog or digital)	VT violet
T	Teach input	GY grey
Z	Time delay (activation)	WH white
S	Shielding	PK pink
RxD	RS-232 receive path	GNYE green yellow
TxD	RS-232 send path	
U	Test input	
W	Trigger input	
O	Analog output (1,2,3...)	
O-	Ground for the analog output	
bZ	Block discharge	
AwV	Valve output	
a	Valve control output "+"	
b	Valve control output "0V"	
SY	Synchronization	
E+	Receiver-Line	
S+	Emitter-Line	
⊕	Grounding	

Specifications are subject to change without notice

28/02