


Inductive Proximity Switch

non-flush Housing W M18 x 1

IW080NM80KD

Part Number

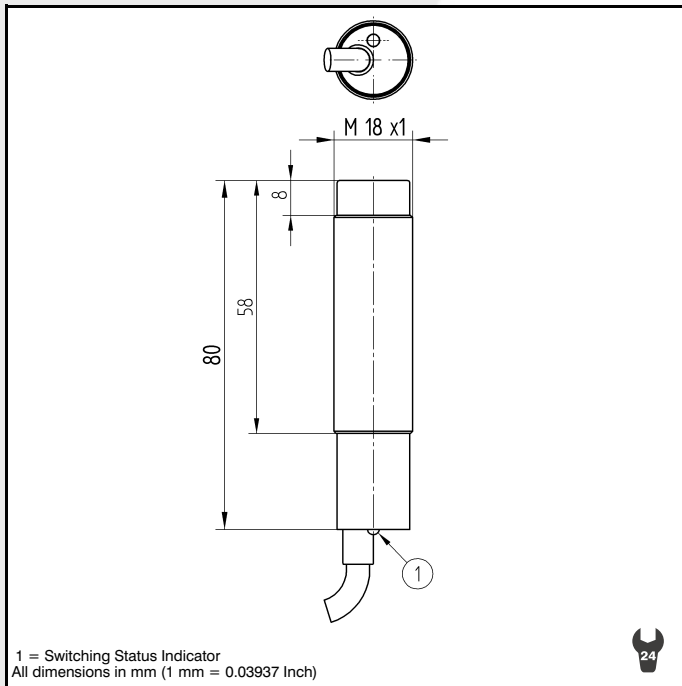


Technical Data

Inductive Data	
Switching Distance	8 mm
Correction Factors V2A / Brass / Al	0.77/0.51/0.50
Mounting	non-flush
Switching Hysteresis	< 15 %
Electrical Data	
Supply Voltage	20...250 V AC
Supply Voltage	20...250 V DC
Min. Output Current	5 mA
Switching Frequency	25 Hz
Temperature Drift	< 10 %
Temperature Range	-25...80 °C
Switching Output Voltage Drop	< 4.5 V
Switching Output/Switching Current	400 mA
Residual Current Switching Output	< 2500 µA
Short Circuit Protection	yes
Mechanical Data	
Housing	BrasNicPlated
Full Encapsulation	yes
Protection Mode	IP 67
Connection	Prewired
Cabel Length	2 m
Protective Insulation, Rated Voltage	250 V



Part Number	IW080NM80KD
AC / DC NC	●
Connection Diagram No.	807

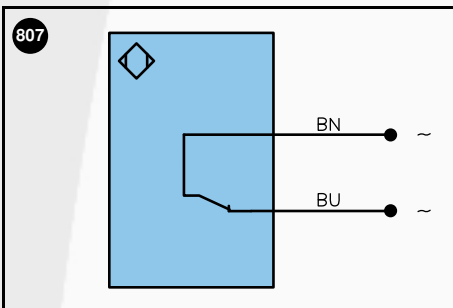

Legend			
+	Power supply "+"	U	Test input
-	Power supply "0V"	W	Trigger input
~	Power supply (AC Voltage)	O	Analog output (1,2,3...)
A	Switching output (1,2,3...) / NO	O-	Ground for the analog output
Ā	Switching output (1,2,3...) / NC	bz	Block discharge
V	Contamination / Error output (NO)	Aw	Valve output
V	Contamination / Error output (NC)	a	Valve control output "+"
E	Input (analog or digital)	b	Valve control output "0V"
T	Teach input	SY	Synchronization
Z	Time delay (activation)	E+	Receiver-Line
S	Shielding	S+	Emitter-Line
RxD	RS-232 receive path	⊕	Grounding
TxD	RS-232 send path		

Wire colors according to DIN IEC 757	
BK	black
BN	brown
RD	red
OG	orange
YE	yellow
GN	green
BU	blue
VT	violet
GY	grey
WH	white
PK	pink
GNYE	green yellow

Specifications are subject to change without notice

28/02