

Reflex Sensors

with Background Suppression


HN24PBV3

Part Number




- Electronic Background Suppression
- Highly resistant to water and dust thanks to full encapsulation
- Red Light

These sensors are particularly well suited for recognizing objects in front of any type of background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

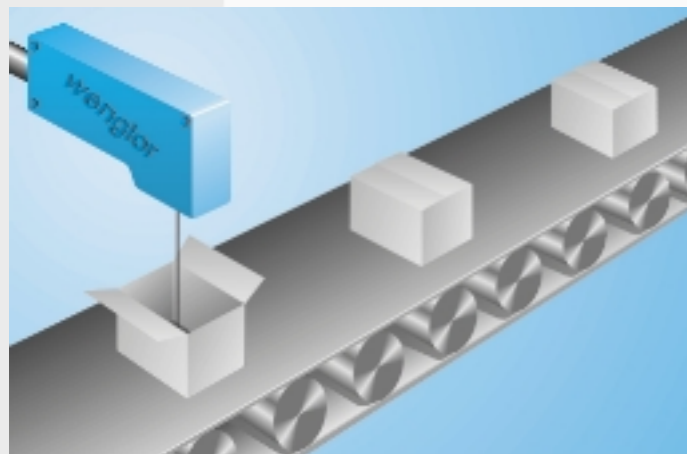

Technical Data

Optical Data	
Range	150 mm
Switching Hysteresis	< 5 %
Light Source	Red Light
Service Life (T = +25°C)	100000 h
max. Ambient Light	10000 Lux
Light Spot Diameter	see Table 1
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24V)	30 mA
Switching Frequency	600 Hz
Response Time	833 μs
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2.5 V
PNP Switching Output/Switching Current	200 mA
PNP Contamination Output/Switching Current	50 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Mechanical Data	
Housing	Plastic
Full Encapsulation	yes
Protection Mode	IP 67
Connection	M 12x1
Protective Insulation, Rated Voltage	50 V

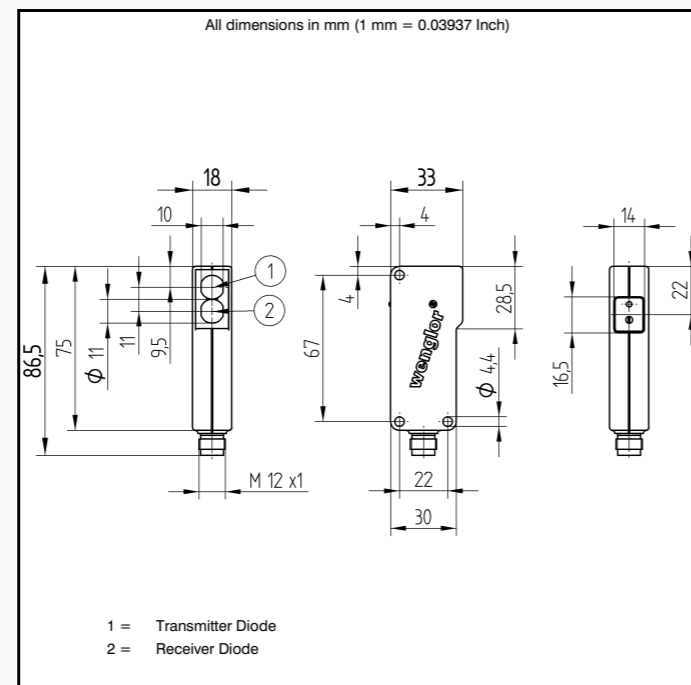


Specifications are subject to change without notice
17/03



Table 1

Range	60 mm	100 mm	150 mm
Light Spot Diameter	5 mm	4 mm	6 mm

Plug Version	
Part Number	HN24PBV3
Contamination Output	●
PNP NO	●
Connection Diagram No.	103
Control Panel No.	N 1
Suitable Plug No.	1

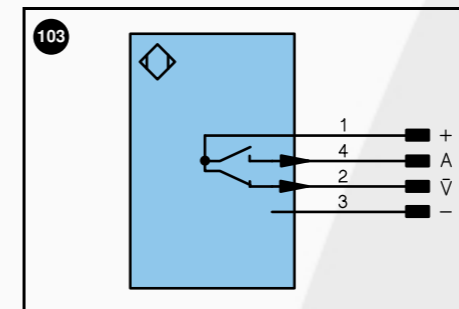

Legend		Wire colors according to DIN IEC 757
+ Power supply "+"	U Test input	BK black
- Power supply "0V"	W Trigger input	BN brown
- Power supply (AC Voltage)	O Analog output (1,2,3,...)	RD red
A Switching output (1,2,3...) / NO	O- Ground for the analog output	OG orange
A Switching output (1,2,3...) / NC	BZ Block discharge	YE yellow
V Contamination / Error output (NO)	Aw Valve output	GN green
V Contamination / Error output (NC)	a Valve control output "+"	BU blue
E Input (analog or digital)	b Valve control output "0V"	VT violet
T Teach input	SY Synchronization	GY grey
Z Time delay (activation)	E+ Receiver-Line	WH white
S Shielding	S+ Emitter-Line	PK pink
RxD RS-232 receive path	⊕ Grounding	GNYE green yellow
TxD RS-232 send path		

Accessories

Mounting Bracket WN

Ctrl. Panel



05 = Switching Distance Adjuster
30 = Switching Status/Contamination Warning

Switching Distance Deviation

Typical characteristic curve based on Kodak white, 90%

