

Reflex Sensors

with Background Suppression **LASER**

YD24PA3

Part Number





Technical Data

Optical Data	
Range	150 mm
Switching Hysteresis	< 5 %
Light Source	Laser (red)
Wave Length	655 nm
Service Life (T = +25°C)	100000 h
Laser Protection Class (EN 60825-1)	2
max. Ambient Light	10000 Lux
Electrical Data	
Supply Voltage	10...30 V DC
Current Consumption (U _b = 24V)	< 25 mA
Switching Frequency	1 kHz
Response Time	500 μs
Temperature Drift	< 5 %
Temperature Range	-25...60 °C
Switching Output Voltage Drop	< 2.5 V
PNP Switching Output/Switching Current	200 mA
Short Circuit Protection	yes
Reverse Polarity Protection	yes
Overload Protection	yes
Mechanical Data	
Housing	Stainless Steel
Full Encapsulation	yes
Protection Mode	IP 67
Connection	M 12x1
Protective Insulation, Rated Voltage	50 V


- Spot Diameter: 0.5 mm
- Stainless Steel Housing
- Switching Frequency: 1 kHz

These sensors are particularly well suited for recognizing objects in front of any type of background. The color, shape and surface characteristics of the object have practically no influence on sensor switching performance.

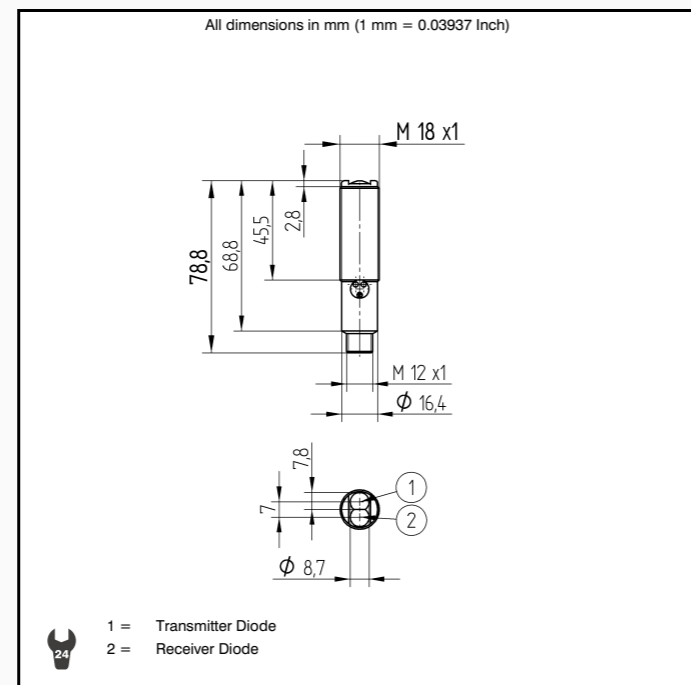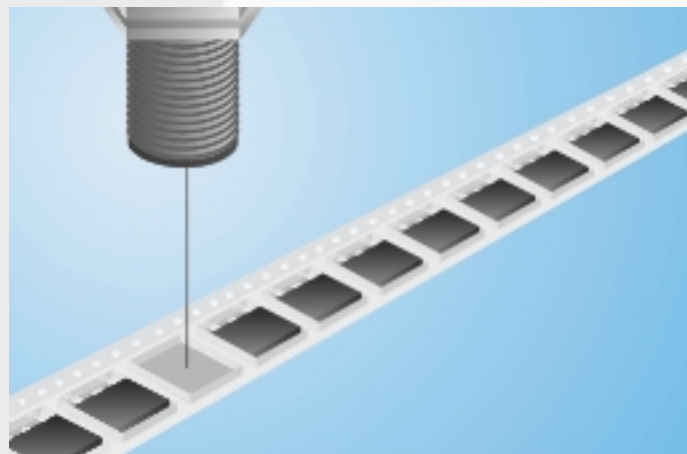

Specifications are subject to change without notice
17/03

Plug Version	Part Number
YD24PA3	YD24PA3
PNP NO/NC antivalent	●
Connection Diagram No.	101
Control Panel No.	D 6
Suitable Plug No.	1

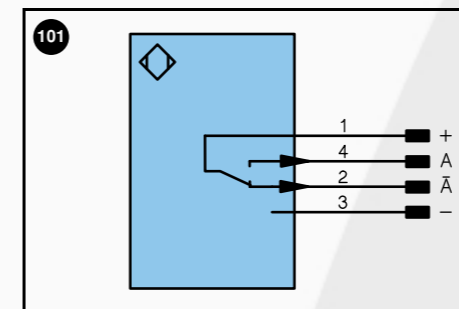

Legend		Wire colors according to DIN IEC 757
+	Power supply "+"	BK black
-	Power supply "0V"	BN brown
-	Power supply (AC Voltage)	RD red
A	Switching output (1,2,3...)/ NO	OG orange
A-bar	Switching output (1,2,3...)/ NC	YE yellow
V	Contamination / Error output (NO)	GN green
V-bar	Contamination / Error output (NC)	BU blue
E	Input (analog or digital)	VT violet
T	Teach input	GY grey
Z	Time delay (activation)	WH white
S	Shielding	PK pink
RxD	RS-232 receive path	GNYE green yellow
TxD	RS-232 send path	
U	Test input	
W	Trigger input	
O	Analog output (1,2,3,...)	
O-	Ground for the analog output	
BZ	Block discharge	
Aw	Valve output	
a	Valve control output "+"	
b	Valve control output "0V"	
SY	Synchronization	
E+	Receiver-Line	
S+	Emitter-Line	
⊕	Grounding	

Table 1

Range	50 mm	100 mm	150 mm
Light Spot Diameter	1,2 mm	< 0,5 mm	1,5 mm

Accessories

- Mounting Clamp BSM18B
- Mounting Bracket W18

Ctrl. Panel



- 01 = Switching Status Indicator
- 02 = Contamination Warning
- 05 = Switching Distance Adjuster

Switching Distance Deviation

Typical characteristic curve based on Kodak white, 90%

