




Technical Data

Electrical Data	
Response Time (0 mA Load)	8 ms
Temperature Range	-20...60 °C
Relay Outputs	2
Switching Capacity Relay Output	1500 VA
Relay Output/Switching Current	6 A
Switching Voltage Relay Output (6.0 A)	250 V AC
Switching Voltage Relay Output (0.5 A)	250 V DC
Switching Voltage Relay Output (5.0 A)	50 V DC
Protection Class	II
Mechanical Data	
Housing	Plastic PA
Protection Mode	IP 20
Connection	Terminal Block
Protective Insulation, Rated Voltage	250 V
Service Life (Switching Cycle)	10000000

- 2 relay contacts
- Plug connectors
- Potential-free load interruption

In combination with the SS2-00VA000H1 individual safety light barrier control unit, the relay unit allows for the interruption of safety-relevant circuits. Floating safety relays are utilized.

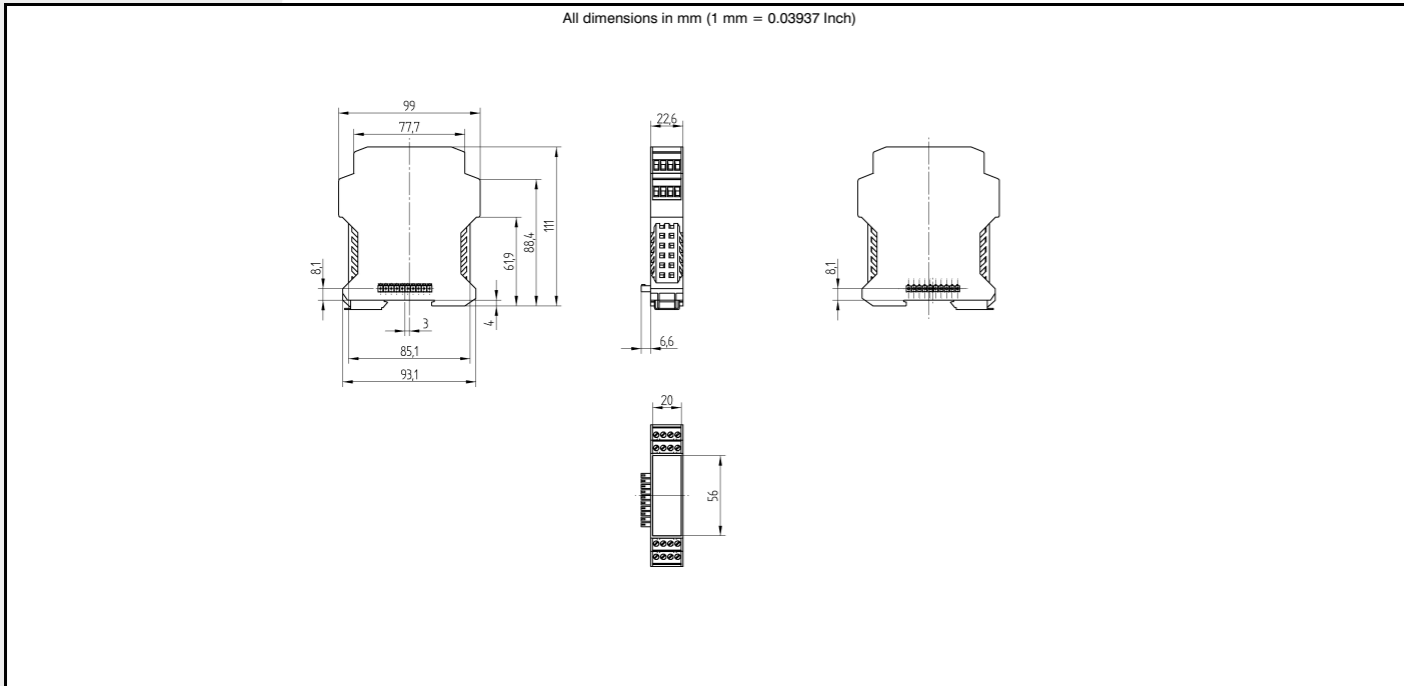

Part Number	SS2-00VA000R1
NO	●
Connection Table Nr.	21