

CATALOGUE

***CAPACITIVE
SENSORS
KXS***





Registration No.: 1327-01



Testing laboratory accredited according to
DIN EN 45001 Reg.-No. DAT-P-048/95-00

For all transactions, the newest version of the „General Conditions of Sale and Delivery for Products and Services of the Electrical Industry ZVEI“ shall apply, along with the supplementary conditions „extended reservation of proprietary rights“, together with the supplements listed on our order confirmations and/or invoices.

All specifications are subject to change without notice. Reprint, even in part, only with our consent.
© RECHNER Germany 10/2007 GB - Printed in EU, all rights reserved.

Edition October 2007 With publication of this catalogue all former printed catalogues about RECHNER capacitive sensors KXS are invalid.

All specifications are subject to change without notice. (10/2007)

CATALOGUE CAPACITIVE SENSORS KXS

TECHNOLOGY
MOUNTING
APPLICATION

Pages 4-5

APPLICATION
EXAMPLES

Page 6

TYPE CODE

Page 7

TECHNICAL
TERMS

Page 8

TYPES
TECHNICAL DATA
DIMENSIONS
CONNECTION
DIAGRAMMS

Pages 9-24

ACCESSORIES
Type selection in
article number/type
description order

Pages 25-26

All specifications are subject to change without notice. (10/2007)

TECHNOLOGY • MOUNTING • APPLICATION

The capacitive proximity sensors that make up the KAS-40..., KAS-70..., KAS-80..., KAS-90, KAS-1000 and KAS-2000 series ... are already established as powerful leaders in today's market. They are well accepted as sensors that are reliable, and there are a large number of versions to suit many applications in the processing industry and throughout mechanical engineering. Nowadays they are indispensable. -Important parameters for the user are the achievable switching distance and the size of the sensor. Larger switching distances require larger sensors.

It is here, that the new KXS/KXA-Systems show their strength. Although one achieves essentially larger switching distances with these capacitive systems, their size is actually smaller.

The sensors of the KXS/KXA-Series are based on a different measuring principle, the three-electrode-principle.

Advantages:

- **Extreme large sensing distance, up to 10-times the norm**
- **miniature sensors from M 5**
- **Measurement of smallest changes in capacity**
- **suitable for high-temperature areas up to +250° C (ceramics +800° C)**
- **up to three adjustable switching points in one sensor (Duplex and Triplex operation)**

With this Measuring principle, one electrode is removed to the outside. The protective conductor-potential PE – that means the machine and system potential – is now also used as a measurement electrode. The evaluation takes place with remote electronics. Due to the absolute measurement of the alteration in capacity, to a large extent, there is an independence of the static basic capacity. This means, the patented KXS/KXA-System detects an alteration of capacity of for example 0,1 pF regardless of whether the (static) basic capacity is 1 pF, 10 pF or 100 pF.

As a result very small switching-hystereses can be achieved.

Thanks to the remote evaluation electronics and the housing materials used, the standard types of capacitive sensors of the KXS-/KXA-Systems are suitable for use in high-temperature areas up to +250° C. For use at high temperatures, or in applications with large variations in temperature, the drift has to be determined by empirical tests. This is necessary, because for the mounting conditions, there is a dependency on the drift. For particular applications, sensors are available in stainless steel/ceramic housings that can be used up to 800° C.

With the three-electrode-principle the mounting variations flush or non-flush are irrelevant. The sensors can be installed in any position, including flush in metal. The function is guaranteed in each mounting position.

Our KXS-... sensors have a cylindrical design with threads from M 5 to M 32. The following types are available as evaluation units: KXA-5-1.. one sensor KXS -... with a limit switching point; the multi-channel evaluators KXA-5-M/S -..., KXA-5-4-... for several sensors as well as the evaluator KXA-5-1/3 -... for Duplex or Triplex applications.

Application example for Duplex operation:

No target at sensor	=	no output signal
empty glass-bottle present	=	output signal 1
full glass-bottle	=	output signal 1 and 2

It is easy to put the capacitive system in to operation:

Mechanical mounting of the sensor + electrical connection + adjustment = ready for operation.

Please note, if the sensor is not screwed in to metal, a galvanic connection must take place from the electronics to the protective conductor-potential.

The KXS/KXA series of capacitive sensors can be used for level monitoring of liquids, pastes or bulk material, including measurement through non-metal partitions. Furthermore as limit switches, contact-less position switches for monitoring and positioning, as pulse generator for counting tasks and for many other applications.

Wiring of the capacitive sensors should be routed separately or screened from large value conducting cables, as in extreme cases inductive peak voltages can destroy the sensors despite the integrated protective circuit. Screened cable or twisted lines are especially recommended long cable runs > 5 m. Direct control of electric light bulbs should be avoided, as during the switch-on moment the cold current is many times the rated current and can destroy the output stage of the sensor.

The data for the **nominal sensing distance** is based on the measuring method defined by DIN VDE 0660, Part 208. The respective nominal sensing distance is indicated with a tolerance of + 10 %. The **standard measurement plate** is square with a thickness of 1 mm and is made of carbon steel FE 360 (defined in ISO 630: 1980) with a smoothed surface and is earthed. The sides are equal to the diameter of the active area of the KAS or equal to 3 x Sn, depending on which value is greater. With a different material or a smaller surface of the actuating element, the sensing distance is smaller.

In order to prevent damage to the threaded sleeves when mounting, the material and version-dependent **maximum torque** should be taken into consideration. The values listed in the table are based on the use of the nuts supplied with the sensors.

Maximum torque		
Thread	PPO	VA
M 5 x 0,5	-	1,5 Nm
M 8 x 1	-	4,5 Nm
M 12 x 1	1 Nm	12 Nm
M 18 x 1	1,7 Nm	40 Nm
M 30 x 1,5	8 Nm	150 Nm
M 32 x 1,5	13 Nm	180 Nm

Due to the permitted thread tolerances specified in German standard DIN 13, the **maximum screw-in length** for threaded sensors should be taken into consideration. Based on this the length of the threaded block for screwing in proximity sensors should not exceed the following dimensions. Where a larger threaded block is used we recommend drilling a blind hole in order to adhere to the maximum screw-in length.

Thread	M 5 x 0,5	M 8 x 1	M 12 x 1	M 18 x 1	M 30 x 1,5	M 32 x 1,5
Max. screw - in length	3 mm	6 mm	8 mm	12 mm	12 mm	12 mm

All specifications are subject to change without notice. (10/2007)

APPLICATION EXAMPLES

Fig. 1: Duplex application

A possibility for Triplex-Function, with this example, could be the limit switching point S_3 indicating “bottle filled with water

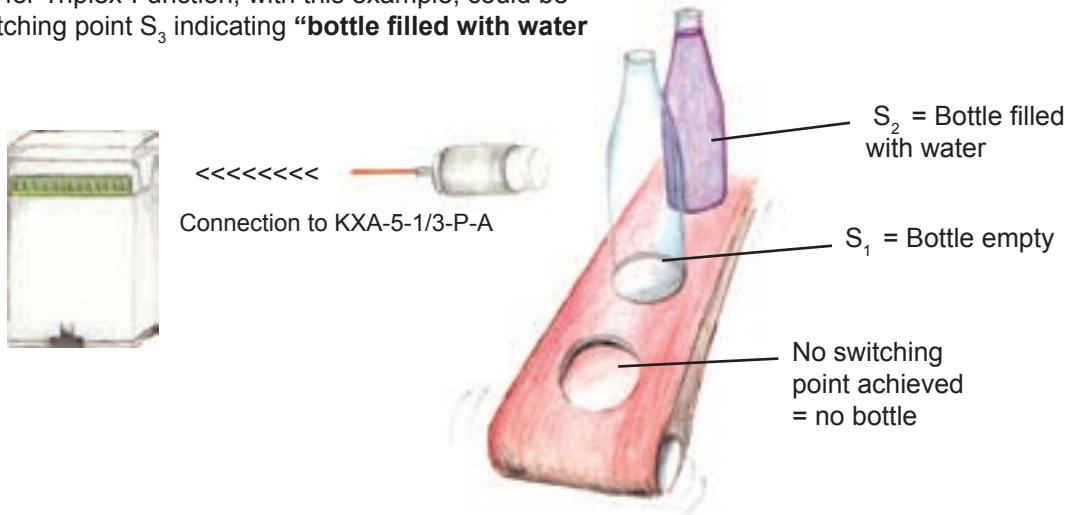


Fig. 2: Application in a container with glue

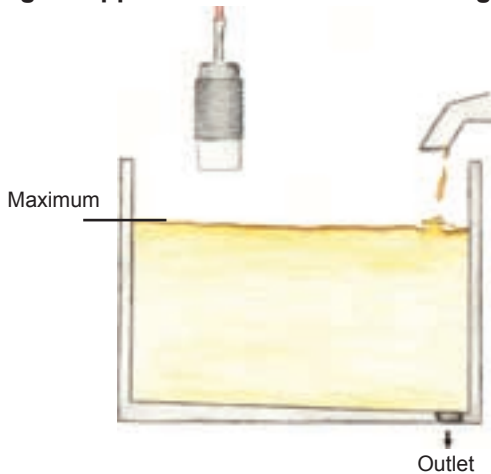


Fig. 4: Overflow protection of casts, for example for plastic lenses for glasses



Fig. 3: Application in a container with granules


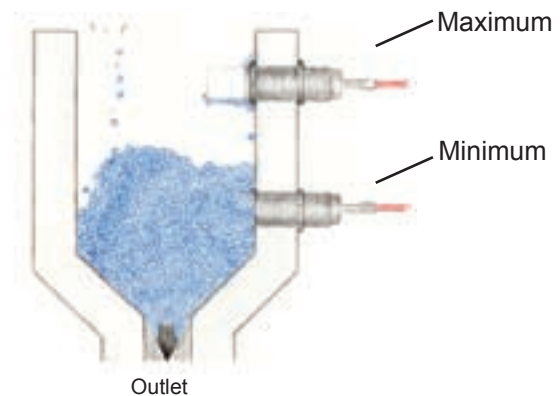


Fig. 5: For detection of accumulations during the production of small parts, like tablets

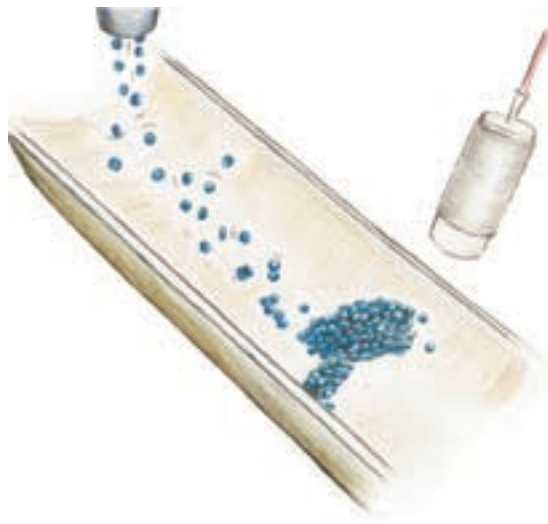

All specifications are subject to change without notice. (10/2007)

TYPE CODE

Capacitive evaluation unit

KXA-5-1-...-A-...

Capacitive evaluation unit

Measurement of limit values

1 limit switching point

MINI = for sensor size $\varnothing = M 5 - M 12$

Antivalent output

P = transistor output PNP
N = transistor output NPN

KXA-5-...-...-S/A-...-...

Capacitive evaluation unit

Measurement of limit values

3/4 = 3/4 sensors with one
limit switching point
1/3 = 1 sensor with up to 3 adjustable
switching points

M = Master
S = Slave
(not with Triplex evaluation units)

MINI = for sensor size
 $\varnothing = M 5 - M 12$

If applicable
CC = Combicon connection

S = NO output
A = Antivalent output

P = transistor output PNP
N = transistor output NPN

Capacitive sensor

KXS-.../...-...

Capacitive sensor

Diameter

K = Plastic housing, if applicable
Extended temperature range and special
versions if applicable

Sensor length in [mm]

Other process connection on request.

TECHNICAL TERMS

Housing materials

The application of the housing materials used is based on the technical specifications of the material and of the manufacturer. Even though RECHNER Sensors have far-reaching application experience concerning the use of different housing materials, the customer is responsible for checking in each case that the housing material is suitable for the application.

Cable

For the standard models COAX-, TRIAX-, PVC- or PUR-cable are used. One has to take into consideration that the cable should not be moved with ambient temperatures below -5°C . PVC is not suitable for use in applications with oil-based liquids or with UV-radiation. PUR is not suitable for continuous contact with water. For special application areas silicone or PTFE cables are available. COAX- and TRIAX-Cable are not destined for continuous movement/flexible use. When routing please consider the bending radius of minimum $10 \times \varnothing$.

Sensing distance S_n

Characteristic value of a proximity sensor, without consideration of production tolerances and variations due to temperature and voltages.

Enclosure rating

IP 65: Protection against contact with voltage-carrying parts, protection against ingress of dust and water jets.

IP 67: Protection against contact with voltage-carrying parts, protection against ingress of dust and protection against ingress of water when the equipment is immersed in water, up to 1 m depths for a period of 30 minutes.

Voltage drop U_d

Voltage drop is the voltage, which is at the active output of the sensor, in the on state.

Repeat accuracy

Measurement of the sensing distance in succession, which is made at constant ambient conditions.

Permitted residual ripple

The permitted residual ripple of the used power pack, used as power supply.

The products of Rechner Industrie-Elektronik GmbH are designed and checked in accordance with the latest standards and specifications, DIN - VDE - IEC, for electrical and electronic instruments. For new and revised products the newest standards are always used.



**Capacitive sensors
Series - KXS**

Housing M 5 x 0.5

- Housing material: Stainless steel VA No. 1.4305
- For connection to capacitive evaluation units KXA-...-MINI
- Extreme large sensing distance
- Up to 250° C ambient temperature


Certificate:



Technical data

Operating distance Sn	3 mm
Operating distance min / max adjustable	0...5 mm
Mounting:	Flush / non-flush
Type	KXS-M5/20
Art.-No.	498 000
Permitted ambient temperature	-70...+250° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-...-MINI with plug-in connector	2 m FEP, Triax
Housing material	VA No. 1.4305
Active surface	PTFE

All specifications are subject to change without notice. (10/2007)

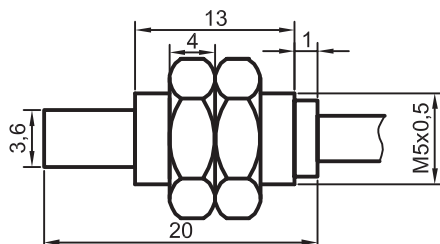

Made in Germany



Capacitive sensors Series - KXS

Housing M 8 x 1


- Housing material: Stainless steel VA No. 1.4305
- For connection to capacitive evaluation units KXA-...-MINI
- Extreme large sensing distance
- Up to 250° C ambient temperature

Certificate:



Technical data

Operating distance S_n	7 mm
Operating distance min / max adjustable	0...10 mm
Mounting:	Flush / non-flush
Type	KXS-M8/25
Art.-No.	498 001
Permitted ambient temperature	-70...+250° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-...-MINI with plug-in connector	2 m FEP, Triax
Housing material	VA No. 1.4305
Active surface	PTFE

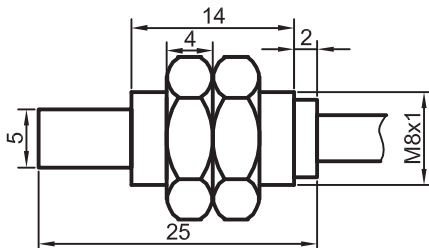

Made in Germany

All specifications are subject to change without notice. (10/2007)



**Capacitive sensors
Series - KXS**

Housing M 12 x 1

- Housing material: Stainless steel VA No. 1.4305
- For connection to capacitive evaluation units KXA-...-MINI
- Extreme large sensing distance
- Up to 250° C ambient temperature


Certificate:



Technical data

Operating distance Sn	15 mm
Operating distance min / max adjustable	1...25 mm
Mounting:	Flush / non-flush
Type	KXS-M12/25
Art.-No.	498 002
Permitted ambient temperature	-70...+250° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-...-MINI with plug-in connector	2 m FEP, Triax
Housing material	VA No. 1.4305
Active surface	PTFE

All specifications are subject to change without notice. (10/2007)

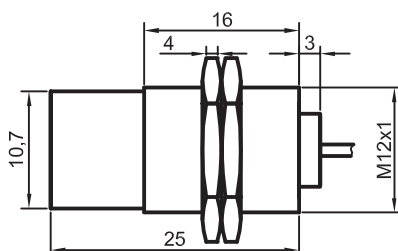

Made in Germany



Capacitive sensors Series - KXS

Housing M 12 x 1


- Housing material: PPO
- For connection to capacitive evaluation units KXA-...-MINI
- Extreme large sensing distance

Certificate:



Technical data

Operating distance S_n	15 mm
Operating distance min / max adjustable	1...25 mm
Mounting:	Flush / non-flush
Type	KXS-M12/50-K
Art.-No.	KX 0054
Permitted ambient temperature	-25...+70° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-...-MINI with plug-in connector	2 m FEP, Triax
Housing material	PPO
Active surface	PPO

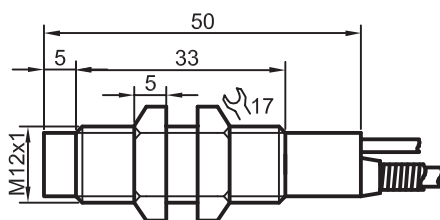

Made in Germany

All specifications are subject to change without notice. (10/2007)



**Capacitive sensors
Series - KXS**

Housing M 18 x 1

- Housing material: Stainless steel VA No. 1.4305
- For connection to capacitive evaluation units KXA-...
- Extreme large sensing distance
- Up to 250° C ambient temperature


Certificate:



Technical data

Operating distance Sn	30 mm
Operating distance min / max adjustable	2...50 mm
Mounting:	Flush / non-flush
Type	KXS-M18/70
Art.-No.	498 003
Permitted ambient temperature	-70...+250° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-... with plug-in connector	2 m FEP, Triax
Housing material	VA No. 1.4305
Active surface	PTFE

All specifications are subject to change without notice. (10/2007)

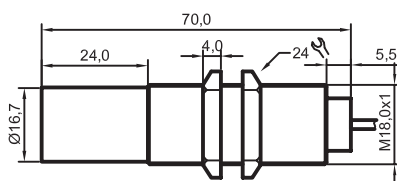

Made in Germany



Capacitive sensors Series - KXS

Housing M 12 x 1


- Housing material: PPO
- For connection to capacitive evaluation units KXA-...
- Extreme large sensing distance

Certificate:



Technical data

Operating distance S_n	30 mm
Operating distance min / max adjustable	2...50 mm
Mounting:	Flush / non-flush
Type	KXS-M18/70-K
Art.-No.	KX 0053
Permitted ambient temperature	-25...+70° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-... with plug-in connector	2 m FEP, Triax
Housing material	PPO
Active surface	PPO

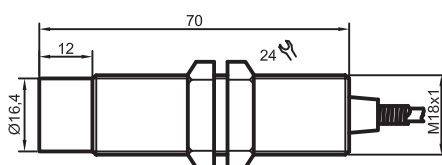

Made in Germany

All specifications are subject to change without notice. (10/2007)



**Capacitive sensors
Series - KXS**

Housing M 30 x 1.5

- Housing material: Stainless steel VA No. 1.4305
- For connection to capacitive evaluation units KXA-...
- Extreme large sensing distance
- Up to 250° C ambient temperature


Certificate:



Technical data

Operating distance Sn	60 mm
Operating distance min / max adjustable	5...100 mm
Mounting:	Flush / non-flush
Type	KXS-M30/70
Art.-No.	498 004
Permitted ambient temperature	-70...+250° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-... with plug-in connector	2 m FEP, Triax
Housing material	VA No. 1.4305
Active surface	PTFE

All specifications are subject to change without notice. (10/2007)

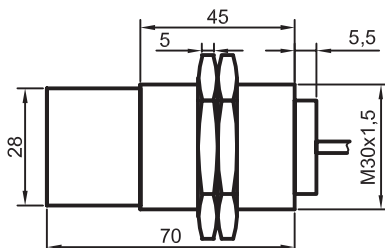

Made in Germany



Capacitive sensors Series - KXS

Housing M 30 x 1.5


- Housing material: PPO
- For connection to capacitive evaluation units KXA-...-MINI
- Extreme large sensing distance

Certificate:



Technical data

Operating distance S_n	60 mm
Operating distance min / max adjustable	5...100 mm
Mounting:	Flush / non-flush
Type	KXS-M30/70-K
Art.-No.	KX 0051
Permitted ambient temperature	-25...+70° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-... with plug-in connector	2 m FEP, Triax
Housing material	PPO
Active surface	PPO

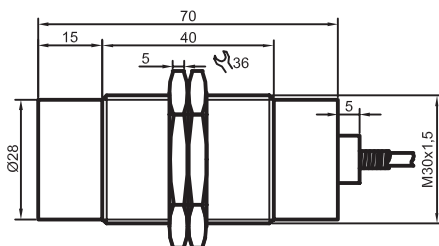

Made in Germany

All specifications are subject to change without notice. (10/2007)



**Capacitive sensors
Series - KXS**

Housing M 32 x 1.5

- Housing material: Stainless steel VA No. 1.4305
- For connection to capacitive evaluation units KXA-...
- Extreme large sensing distance
- Up to 250° C ambient temperature


Certificate:



Technical data

Operating distance Sn	80 mm
Operating distance min / max adjustable	5...120 mm
Mounting:	Flush / non-flush
Type	KXS-M32/70
Art.-No.	498 005
Permitted ambient temperature	-70...+250° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-... with plug-in connector	2 m FEP, Triax
Housing material	VA No. 1.4305
Active surface	PTFE

All specifications are subject to change without notice. (10/2007)

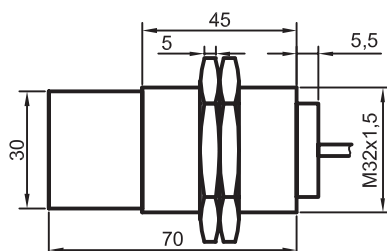

Made in Germany



Capacitive sensors Series - KXS

Housing M 32 x 1.5


- Housing material: PPO
- For connection to capacitive evaluation units KXA-...
- Extreme large sensing distance

Certificate:



Technical data

Operating distance S_n	80 mm
Operating distance min / max adjustable	5...120 mm
Mounting:	Flush / non-flush
Type	KXS-M32/70-K
Art.-No.	KX 0052
Permitted ambient temperature	-25...+70° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-... with plug-in connector	2 m FEP, Triax
Housing material	PPO
Active surface	PPO

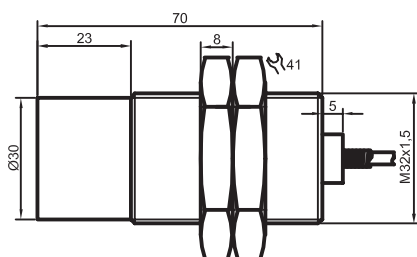

Made in Germany

All specifications are subject to change without notice. (10/2007)



Capacitive sensors Series - KXS

Housing \varnothing 28 mm

- Housing material: Stainless steel VA No. 1.4305/ ceramic
- For connection to capacitive evaluation units KXA-...
- Extreme large sensing distance
- Up to 800° C ambient temperature


Certificate:



Technical data

Operating distance Sn	60 mm
Operating distance min / max adjustable	10...100 mm
Mounting:	Non-flush
Type	KXS-28/82-800°C
Art.-No.	498 007
Permitted ambient temperature	-70...+800° C
Enclosure rating IEC 60529	IP 67
Norm	EN 60947-5-2
Connection cable for connection to capacitive evaluation units KXA-... with plug-in connector	1.5 m FEP, Triax with metal protection tube
Housing material	VA No. 1.4305 / ceramic
Active surface	VA No. 1.4305 / ceramic

All specifications are subject to change without notice. (10/2007)

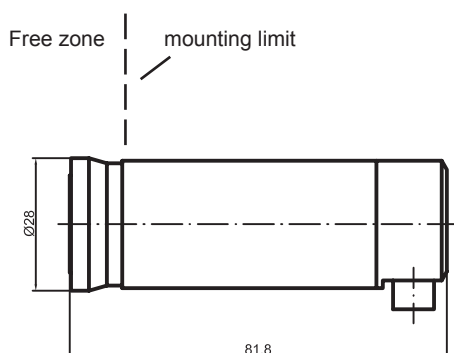

Made in Germany



Capacitive evaluation units - KXA

Series - NPN

Series - PNP


- KXA-... for connection to capacitive sensors KXS-M18/...-M32/...
- KXA-...-MINI for connection to capacitive sensors KXS-M5/...-M12/...

Certificate:




Technical data


Electrical version	4-wire DC	4-wire DC
Output	Antivalent	Antivalent
Type NPN	KXA-5-1-N-A-MINI	KXA-5-1-N-A
Art.-No.	498 505	498 501
Connection diagram No.	3	3
Type PNP	KXA-5-1-P-A-MINI	KXA-5-1-P-A
Art.-No.	498 503	498 500
Connection diagram No.	6	6
Operating voltage (U_B)	18...36 V DC	18...36 V DC
Output current max. (I_e)	2 x 250 mA	2 x 250 mA
Voltage drop max. (U_o)	< 2.5 V	< 2.5 V
Permitted residual ripple max.	40 %	40 %
No-load current (I_o)	Typ. 50 mA	Typ. 50 mA
Frequency of operating cycles max.	50 Hz	50 Hz
Switching hysteresis	≤ 20%	≤ 20%
Repeat accuracy	≤ 1%	≤ 1%
Permitted ambient temperature	-25...+55° C	-25...+55° C
LED-display	Green/yellow	Green/yellow
Protective circuit	Built-in	Built-in
Degree of protection IEC 60529	IP 65	IP 65
Norm	EN 60947-5-2	EN 60947-5-2
Connection cable	PUR 2 m, 4 x 0.14 mm ²	PUR 2 m, 4 x 0.14 mm ²
Housing material	PA	PA

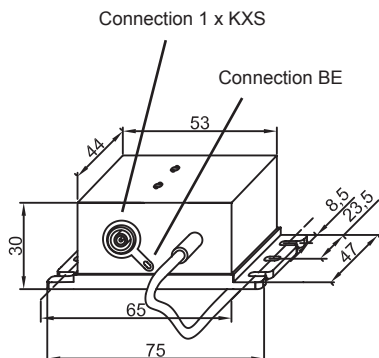


1




2




3




4



5



6



Made in Germany

All specifications are subject to change without notice. (10/2007)



Capacitive evaluation units - KXA (Triplex)

Series - NPN

Series - PNP

- Triplex - evaluation unit (3 adjustable switching points) for connection to capacitive sensors KXS-M18/...-M32/... KXA-...-MINI for KXS-M5/...-M12/...
- Output function changeable (for safety circuits)


Certificate:



Technical data

Output	3 x Antivalent	3 x Antivalent
Type NPN	KXA-5-1/3-N-A-MINI	KXA-5-1/3-N-A
Art.-No.	498 509	498 508
Connection diagram No.	See below	See below
Type PNP	KXA-5-1/3-P-A-MINI	KXA-5-1/3-P-A
Art.-No.	498 511	498 510
Connection diagram No.	See below	See below
Operating voltage (U_B)	18...36 V DC	18...36 V DC
Output current max. (I_o)	400 mA each output	400 mA each output
Permitted residual ripple max.	40 %	40 %
Power consumption (outputs without load)	Typ. 3.5 W	Typ. 3.5 W
Permitted ambient temperature	-25...+55° C	-25...+55° C
LED - display	Green/yellow	Green/yellow
Protective circuit	Built-in	Built-in
Degree of protection IEC 60529	IP 20	IP 20
Norm	EN 60947-5-2	EN 60947-5-2
Connection	Screw terminals and triax socket	Screw terminals and triax socket
Housing material	ABS	ABS

All specifications are subject to change without notice. (10/2007)

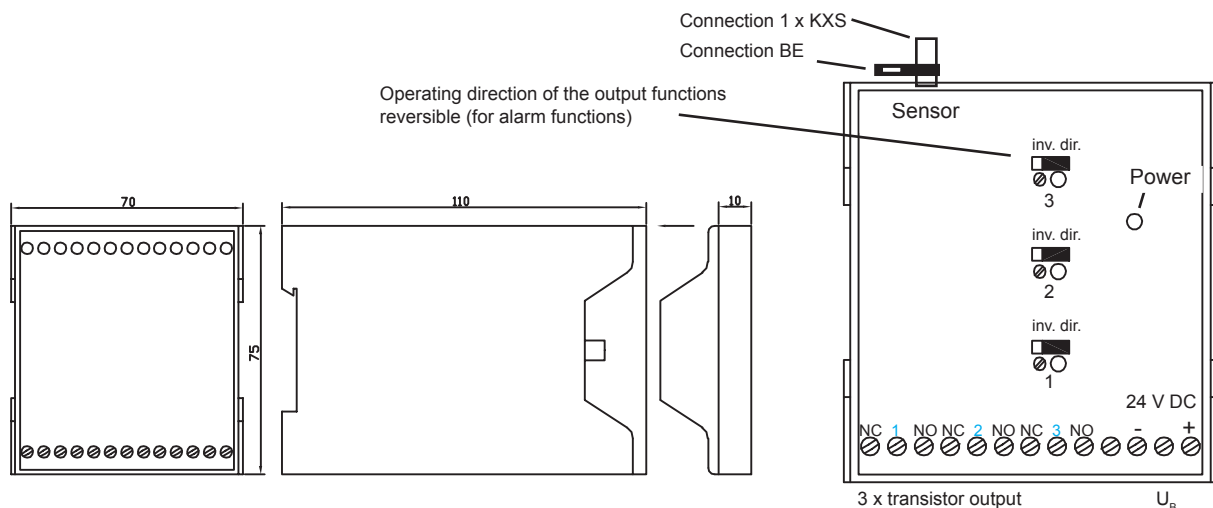

Made in Germany



Capacitive evaluation units - KXA (Master)

Series - NPN
Series - PNP


- KXA-... for connection of 3 capacitive sensors KXS-M18/... - M32/...
- KXA-...-MINI for connection of 3 capacitive sensors KXS-M5/... - M12/...
- Output function changeable (for safety circuits)
- Extension possible with Slave and Slave-MINI

Certificate:



Technical data

Output	3 x Antivalent	3 x Antivalent
Type NPN	KXA-5-M-3-N-A-MINI	KXA-5-M-3-N-A
Art.-No.	498 513	498 512
Connection diagram No.	See below	See below
Type PNP	KXA-5-M-3-P-A-MINI	KXA-5-M-3-P-A
Art.-No.	498 514	498 506
Connection diagram No.	See below	See below
Operating voltage (U_B)	18...36 V DC	18...36 V DC
Output current max. (I_o)	400 mA each output	400 mA each output
Permitted residual ripple max.	40 %	40 %
No-load current (I_o)	120 mA	120 mA
Permitted ambient temperature	-25...+55° C	-25...+55° C
LED - display	Green/yellow	Green/yellow
Protective circuit	Built-in	Built-in
Degree of protection IEC 60529	IP 20	IP 20
Norm	EN 60947-5-2	EN 60947-5-2
Connection	Screw terminals and triax socket	Screw terminals and triax socket
Housing material	ABS	ABS

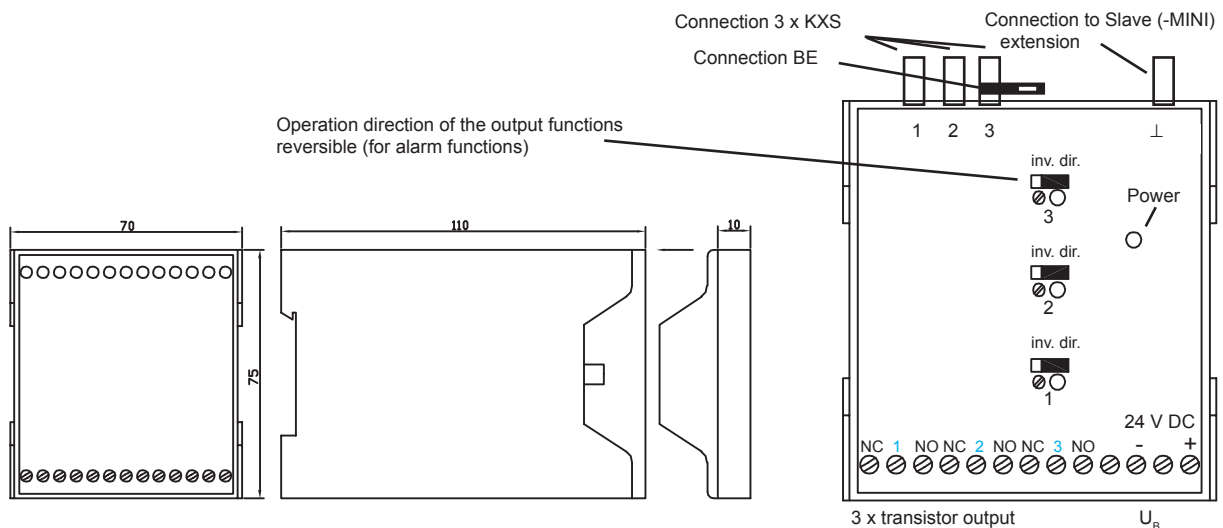

All specifications are subject to change without notice. (10/2007)

Made in Germany



Capacitive Evaluator - KXA
Series - NPN
Series - PNP

- KXA-... for connection of 4 capacitive Sensors KXS-M18/... to -M32/...
- KXA-...MINI for connection of 4 capacitive Sensors KXS-M5/... to -M12/...
- With sensor break control
- Extension possible with slave function




Certificate:

Technical data

Output	4 x NO	4 x NO
Type NPN	KXA-5-4-N-S-4FB-Ö-CC-MINI	KXA-5-4-N-S-4FB-Ö-CC
Art.-No.	XA 0033	XA 0034
Connection diagram No.	See below	See below
Type PNP	KXA-5-4-P-S-4FB-Ö-CC-MINI	KXA-5-4-P-S-4FB-Ö-CC
Art.-No.	XA 0024	XA 0020
Connection diagram No.	See below	See below
Operating voltage (U_b)	18...36 V DC	18...36 V DC
Output current max. (I_o)	400 mA each output	400 mA each output
Permitted residual ripple max.	40 %	40 %
No-load current (I_o)	130 mA	130 mA
Permitted ambient temperature	-25...+55° C	-25...+55° C
LED - display	Green/yellow	Green/yellow
Protective circuit	Built-in	Built-in
Degree of protection IEC 60529	IP 54	IP 54
Norm	EN 60947-5-2	EN 60947-5-2
Connection	Screw terminals and triax socket	Screw terminals and triax socket
Housing material	ABS	ABS
Wire break control	1 x each channel	1 x each channel
Output wire break	4 x NC	4 x NC

All specifications are subject to change without notice. (10/2007)

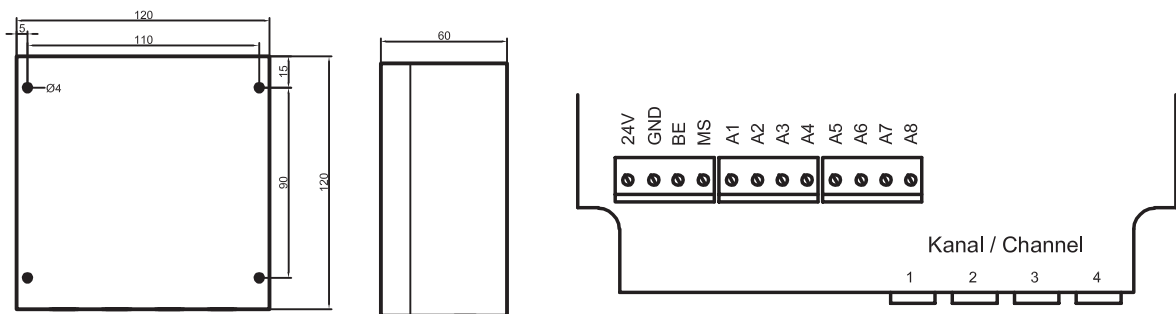

Made in Germany



Capacitive Evaluator - KXA
Series - NPN
Series - PNP



- KXA-... for connection of 4 capacitive Sensors KXS-M18/... to -M32/...
- KXA-...MINI for connection of 4 capacitive Sensors KXS-M5/... to M12/...
- Extension possible with slave function

Certificate:



Technical data

Output	4 x Antivalent	4 x Antivalent
Type NPN	KXA-5-4-N-A-CC-MINI	KXA-5-4-N-A-CC
Art.-No.	XA 0029	XA 0030
Connection diagram No.	See below	See below
Type PNP	KXA-5-4-P-ACC-MINI	KXA-5-4-P-A-CC
Art.-No.	XA 0026	XA 0022
Connection diagram No.	See below	See below
Operating voltage (U_B)	18...36 V DC	18...36 V DC
Output current max. (I_o)	400 mA each output	400 mA each output
Permitted residual ripple max.	40 %	40 %
No-load current (I_o)	120 mA	120 mA
Permitted ambient temperature	-25...+55° C	-25...+55° C
LED - display	Green/yellow	Green/yellow
Protective circuit	Built-in	Built-in
Degree of protection IEC 60529	IP 54	IP 54
Norm	EN 60947-5-2	EN 60947-5-2
Connection	Screw terminals and triax socket	Screw terminals and triax socket
Housing material	ABS	ABS

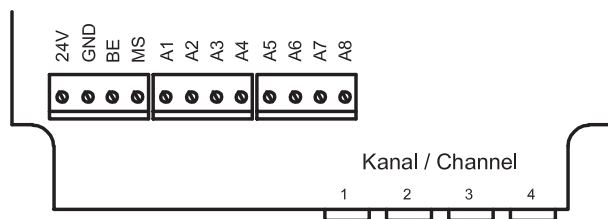

All specifications are subject to change without notice. (10/2007)

Made in Germany

Capacitive evaluation units - KXA (Slave)

Extension of the KXA-connections is possible with use of a capacitive evaluation unit KXA (Master) with a capacitive evaluation unit (Slave).

Each evaluation unit KXA (Slave) provide further 3 KXS-connections and one extension socket.

For the connection to the evaluation unit KXA (Master) the following evaluation units KXA (Slave) are available:

KXA-5-S-3-N-A-MINI	Art.-No. 498516
KXA-5-S-3-N-A	Art.-No. 498515
KXA-5-S-3-P-A-MINI	Art.-No. 498518
KXA-5-S-3-P-A	Art.-No. 498517

Please note: The use of the capacitive evaluation units KXA (Slave) is only possible in connection with a capacitive evaluation unit KXA (Master).

ACCESSORIES



For extra charge the sensors are available with metallic protection tube at the connection cable.

Type selection in article number order

Art.-No.	Type Description	Page	Art.-No.	Type Description	Page
498000	KXS-M5/20	9	498512	KXA-5-M-3-N-A	22
498001	KXS-M8/25	10	498513	KXA-5-M-3-N-A-MINI	22
498002	KXS-M12/25	11	498514	KXA-5-M-3-P-A-MINI	22
498003	KXS-M18/70	13	KX0054	KXS-M12/50-K	12
498004	KXS-M30/70	15	KX0053	KXS-M18/70-K	14
498005	KXS-M32/70	17	KX0051	KXS-M30/70-K	16
498007	KXS-28/82-800°C	19	KX0052	KXS-M32/70-K	18
498500	KXA-5-1-P-A	20	XA0022	KXA-5-4-P-A-CC	24
498501	KXA-5-1-N-A	20	XA0026	KXA-5-4-P-A-CC-MINI	24
498503	KXA-5-1-P-A-MINI	20	XA0020	KXA-5-4-P-S-4FB-Ö-CC	23
498505	KXA-5-1-N-A-MINI	20	XA0024	KXA-5-4-P-S-4FB-Ö-CC-MINI	23
498506	KXA-5-M-3-P-A	22	XA0030	KXA-5-4-N-A-CC	24
498508	KXA-5-1/3-N-A	21	XA0029	KXA-5-4-N-A-CC-MINI	24
498509	KXA-5-1/3-N-A-MINI	21	XA0033	KXA-5-4-N-S-4FB-Ö-CC-MINI	23
498510	KXA-5-1/3-P-A	21	XA0034	KXA-5-4-N-S-4FB-Ö-CC	23
498511	KXA-5-1/3-P-A-MINI	21			

Type selection in description order

Type Description	Art.-No.	Page	Type Description	Art.-No.	Page
KXA-5-1-N-A	498501	20	KXS-M18/70-K	KX0053	14
KXA-5-1-N-A-MINI	498505	20	KXS-M30/70	498004	15
KXA-5-1-P-A	498500	20	KXS-M30/70-K	KX0051	16
KXA-5-1-P-A-MINI	498503	20	KXS-M32/70	498005	17
KXA-5-1/3-N-A	498508	21	KXS-M32/70-K	KX0052	18
KXA-5-1/3-N-A-MINI	498509	21	KXS-M5/20	498000	9
KXA-5-1/3-P-A	498510	21	KXS-M8/25	498001	10
KXA-5-1/3-P-A-MINI	498511	21	KXA-5-4-N-A-CC	XA0030	24
KXA-5-M-3-N-A	498512	22	KXA-5-4-N-A-CC-MINI	XA0029	24
KXA-5-M-3-N-A-MINI	498513	22	KXA-5-4-N-S-4FB-Ö-CC	XA0034	23
KXA-5-M-3-P-A	498506	22	KXA-5-4-N-S-4FB-Ö-CC-MINI	XA0033	23
KXA-5-M-3-P-A-MINI	498514	22	KXA-5-4-P-A-CC	XA0022	24
KXS-28/82-800°C	498007	19	KXA-5-4-P-A-CC-MINI	XA0026	24
KXS-M12/25	498002	11	KXA-5-4-P-S-4FB-Ö-CC	XA0020	23
KXS-M12/50-K	KX0054	12	KXA-5-4-P-S-4FB-Ö-CC-MINI	XA0024	23
KXS-M18/70	498003	13			

All specifications are subject to change without notice. (10/2007)

All specifications are subject to change without notice. (10/2007)

SENSORS for Industrial Automation

**INDUCTIVE • CAPACITIVE
OPTOELECTRONIC • MAGNETORESISTIVE
CALORIMETRIC**

Ask for our further catalogues:

INDUCTIVE SENSORS

CAPACITIVE SENSORS KAS

MAGNETORESISTIVE SENSORS

OPTOELECTRONIC SENSORS

ISOLATING SWITCHING AMPLIFIERS AND POWER SUPPLIES

CAPACITIVE LEVEL MEASURING SYSTEMS

FLOW SENSORS

Your distributor

RECHNER

INDUSTRIE-ELEKTRONIK GmbH

Gaußstraße 8-10 68623 Lampertheim Germany

Tel. (0 62 06) 50 07-0 Fax (0 62 06) 50 07-36 Fax Intl. +49 (0) 62 06 50 07-20

www.rechner-sensors.de

e-mail: info@rechner-sensors.de