



- pmax 6 bar, tmax 100°C
- Connection: G 3/4 ... G 3
- Material: Bronze RG-5



KOBOLD offices exist in the following countries:

**ARGENTINA, AUSTRIA, BELGIUM, BRAZIL, CANADA, CHINA,
COLOMBIA, FRANCE, GREAT BRITAIN, ITALY, NETHERLANDS,
POLAND, SWITZERLAND, USA, VENEZUELA**


KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
☎ (06192) 299-0
Fax (06192) 23398
E-mail: info.de@kobold.com
Internet: www.kobold.com

Model:
DAB

Description

Flow indicator of bronze for the observation of flowing media with threaded bolts for installation in pipework.

Thread connection:	red cast iron
Supports:	red cast iron
Glass:	Duran
Sealing:	Perbunan
Threaded bolts:	Brass MS-58
Ball 15 and 20 mm:	PA 6.6 Density 1.13 g/cm ³
Ball 30, 40 and 50 mm:	Rubber Density 1.46 g/cm ³
Threaded bolts:	accor. to flow range

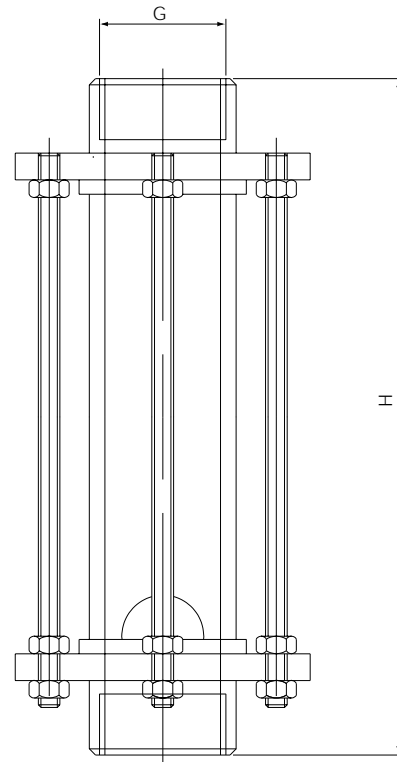

Model	P _{max}	t _{max}	G	Height H (mm)	Glass cylinder D x length (mm)	Weight kg	Ball-diameter (mm)
DAB-..01HR20	6 bar	100 °C	G 3/4	137	32 x 100	0.65	15
DAB-..01HR25	6 bar	100 °C	G 1	145	40 x 100	0.95	20
DAB-..01HR32	6 bar	100 °C	G 1 1/4	145	40 x 100	1.1	20
DAB-..01HR40	6 bar	100 °C	G 1 1/2	145	50 x 100	1.18	20
DAB-..01HR50	6 bar	100 °C	G 2	150	60 x 100	1.25	30
DAB-..01HR65	6 bar	100 °C	G 2 1/2	150	70 x 100	1.76	40
DAB-..01HR80	6 bar	100 °C	G 3	195	90 x 100	3.95	50

Order data (Example: DAB-1101HR20)

Connection thread G	DAB without Ball	DAB with Ball
G 3/4	DAB-1101HR20	DAB-2101HR20
G 1	DAB-1102HR25	DAB-2102HR25
G 1 1/4	DAB-1103HR32	DAB-2103HR32
G 1 1/2	DAB-1104HR40	DAB-2104HR40
G 2	DAB-1105HR50	DAB-2105HR50
G 2 1/2	DAB-1106HR65	DAB-2106HR65
G 3	DAB-1107HR80	DAB-2107HR80